

---

---

**17"/19"**

**Color TFT LCD Monitor**

**User's Manual**

**Version: 01**

\*All other brand names are registered trademarks of their respective owners.

---

---

# Table of Content

- ★ Important Safety Instructions
- ★ FCC Regulation Class B computing system

<b>Chapter 1 Product Overview</b> .....	<b>1-1</b>
1.1 Introduction.....	1-1
1.2 Feature .....	1-2
1.3 Product Specification.....	1-2
1.3.1 Mechanical Drawing.....	1-3
1.3.2 I/O Drawing.....	1-5
1.4 Product Contents .....	1-6
1.5 Product Care.....	1-6
1.6 Caution.....	1-6
<b>Chapter 2 Operation Instruction</b> .....	<b>2-1</b>
2.1 Front Control Panel .....	2-2
2.2 OSD Menu .....	2-3
2.3 Input Signal Icon.....	2-8
2.4 Viewing Angle .....	2-8
2.5 Installation.....	2-9
<b>Chapter 3 Signal Connector</b> .....	<b>3-1</b>
3.1 Signal Connector.....	3-2
<b>Chapter 4 Detail Specification &amp; Warranty</b> .....	<b>4-1</b>
4.1 Details Specification .....	4-2
4.2 After Service .....	4-2



## ★ Important Safety Instructions

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.
6. Clean only with dry cloth.
7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (Including Amplifiers) that produce heat.
9. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
10. Only use attachments/accessories specified by the manufacturer.
11. Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.



12. Unplug this apparatus during lightning storms or when unused for a long period of time.
13. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
14. WARNING: To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture.
15. Apparatus shall not be exposed to dripping or splashing and no objects filled with liquids, such as vases, shall be placed on the apparatus.

## ★ FCC Regulation Class B computing system

---

---

This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generate, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction, may cause harmful interference to radio communications. However, there is no guaranty that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by on or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

**CAUTION:**

- Any changes or modifications not expressly approved by the grantee off this device could void the user's authority to operate the equipment.

**( FOR FCC MODEL ONLY )**

---

---

**Chapter 1**

**Product Overview**

**1.1 Introduction**

Thank you for choosing our new generation LCD monitor. This lightweight, slim design LCD monitor includes many outstanding features and combines the benefit of a high resolution display. Your LCD monitor is safe to use and completely free from any X-ray radiation. We hope you enjoy using our product, and would like to provide the following additional information to assist you in obtaining the best results, using the product safely and in complete comfort.

Please follow ALL instructions and cautions carefully before using this product. And keep this user manual carefully for future reference.

## **1.2 Feature**

This product uses 17"/19" color active matrix TFT (thin-film transistor) monitor, providing high quality displayed images. The maximum achievable resolution is 1280 x 1024, which enables the display of a more complex and high quality images. In addition, the monitor also provides access to the new OSD (On Screen Display) controls.

High contrast color TFT LCD monitor supports VGA resolution up to resolution 1280 x 1024 (17"/19")

Imbedded video signal BNC terminal, S-Video terminal, component signal RCA terminal and Audio signal RCA Jack.

A complete OSD function that optimizes the screen display.

Multi Video System (NTSC/PAL)

500 TVL horizontal video resolutions.

Adjustable stand base.

## **1.3 Product Specification**

*Panel*

- 17.0" Active Matrix TFT LCD.

- 16.2 million colors
- 1280 x 1024 (SXGA) @ 30K~80KHz/ 56~75Hz
  
- 19.0" TFT LCD.
- 16.7 million colors
- 1280 x 1024 (SXGA) @ 30K~80KHz/ 56~75Hz

*I/O connectivity*

- VGA in 15pin mini D-SUB x1
- BNC in/out X 2 sets
- S-video in/ out X 1
- RCA in/out x1 (For SD-19)
- DVI-D in Dual Link type x1 (optional)
- Video Input:
  - VGA
  - S-Video & BNC

*OSD Language*

- English
- Traditional Chinese
- Simplified Chinese
- French
- German
- Spanish
- Italian

*Power Management*

- VESA DPMS Standard

*Power Input*

- AC 100~240V, 50/60Hz; DC +12V/4A

*Power Consumption*


- 45 W Maximum

*Dimension*


- (W)424.19 X (H)437.35 X (D)240 mm (with base)

### 1.3.1 Mechanical Drawing

## 17 inch

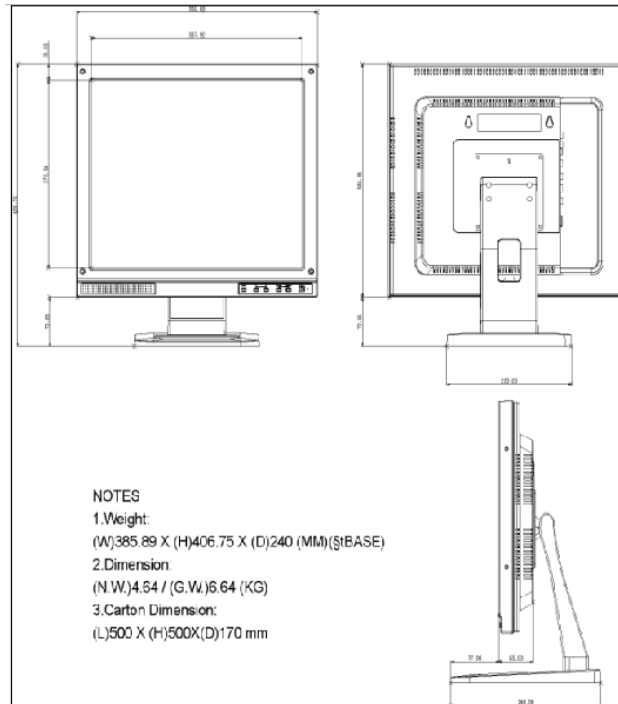


## 19 inch

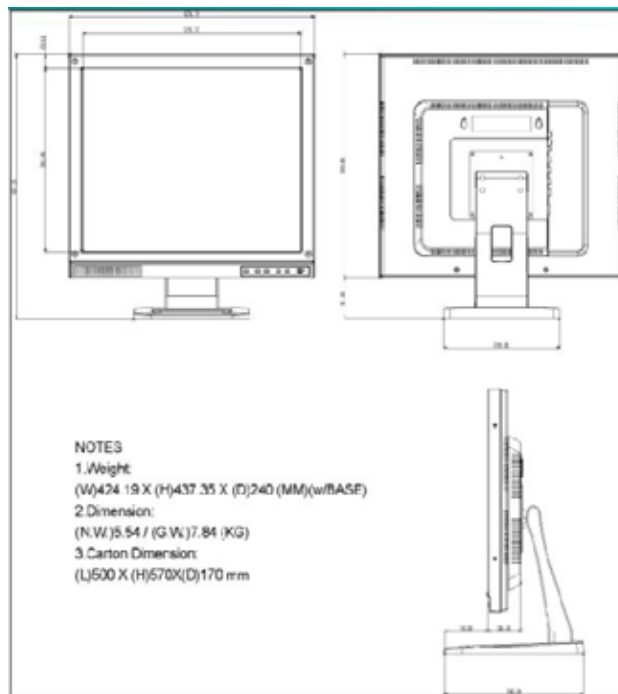


### 1.3.2 I/O Drawing

★ *Standard Type*


**BNC2 In/Out x2 + S-Video In/Out x2**

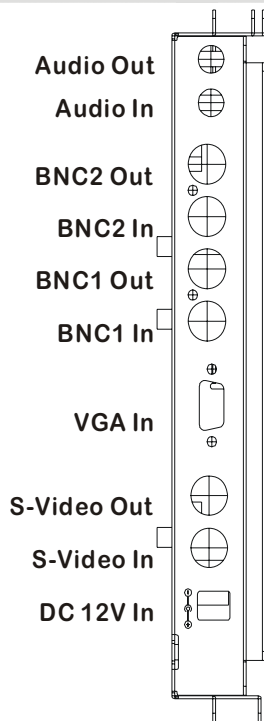


**BNC2 In/Out x2**

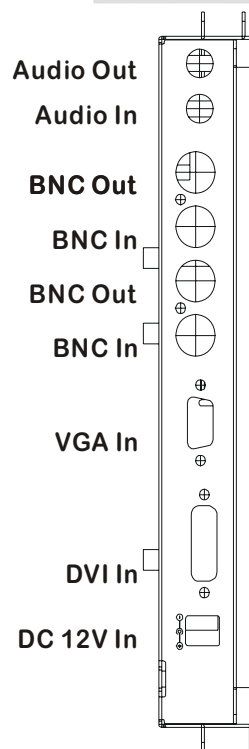

**BNC In/Out x1 + S-Video x1**

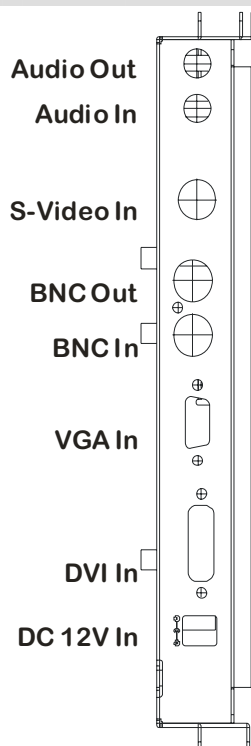

**BNC2 In/Out x1 + S-Video In/Out x1**

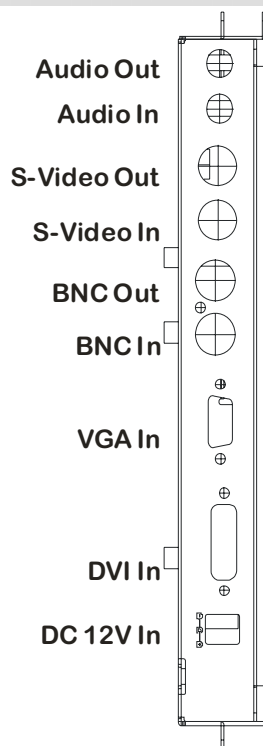

## 1.4 Product Contents

17" /19" TFT LCD Monitor with base  
Power adapter  
Power cable  
Signal cable (VGA Cable)  
User Manual

## 1.5 Product Care

1. To remove dust or dirt from the screen, use a soft clean cotton cloth and wipe gently.
2. Do not apply pressure to the screen surface while wiping
3. Do not use any water or chemical detergent to clean the surface. Chemicals detergent may damage the surface of the LCD.

## 1.6 Caution

### ☆ PRODUCT

1. Do not cover or block the ventilation holes in the back of the monitor case.
2. Do not insert any metal objects into the ventilation holes of the monitor case and be careful not to spill liquids over this product as this could result in severe injury and damage.
3. Unplug the monitor's power cable if not to be used for a long period of time.
4. Do not attempt to dismantle this product. Any attempt to dismantle or remove the covers from this product will invalidate the warranty and may also result in serious injury and damage.
5. Do not touch the screen directly with fingers. The oils from your skin may leave marks on the surface of the screen, which are difficult to be removed and may damage the screen permanently.
6. Do not apply pressure to the LCD screen. The LCD is very delicate and fragile component.

### ☆ MAIN PLUGS ( 2Pin / 3Pin )

1. Do not remove the grounding or earth connection from the power supply/main plug.
  2. Always remember to unplug the LCD Monitor from the power supply under the following circumstances:
    - If the monitor will not be used for a long period of time.
    - If the power supply cable or plug / connector is damaged.
- (Please refer to the "User Manual" when connecting and disconnecting the LCD Monitor from any power supply or other systems and before making any adjustments to the monitor. In the event of any unexpected situation occurring whilst operating the monitor, please switch off the power supply and remove the power cable. If the problem is not explained in the User Manual, please contact your local dealer or our customer service department. If the monitor housing is damaged or broken.

#### ☆ **POWER CORD AND SIGNAL CABLE**


1. Do not put anything on the power cord or signal cable.
2. Do not allow any cables from the monitor to lie on the floor in an area where pedestrians are likely to trip causing injury.
3. This product is supplied with a 3 line-grounding plug. The grounding plug provides an additional safety feature for anyone using this equipment and should not be removed. Please contact a qualified electrician for assistance if the grounding plug and electrical connections appear to differ from the local supply provided. Do NOT throw this safety-grounding plug.
4. Do not overload the power cord or adapter.
5. Do not put the power cord or signal cable in humid places.

#### ☆ **ALLOCATION ENVIRONMENT**

1. DO NOT place this product on any unstable trolleys, shelves or tables as it may fall and cause severe injury and damage.
  2. Always ensure that the monitor is located in a well-ventilated area to prevent the unit from overheating.
- AVOID operating or placing the monitor in the following environments:
- Extreme temperature, whether hot or cold.
  - High humidity.
  - Direct sunlight.
  - Excessively dusty surroundings.
  - Avoid close proximity to other equipment that generates a strong magnetic field.

**Chapter 2**  
**Operation Instruction**

## 2.1 Front Control Panel

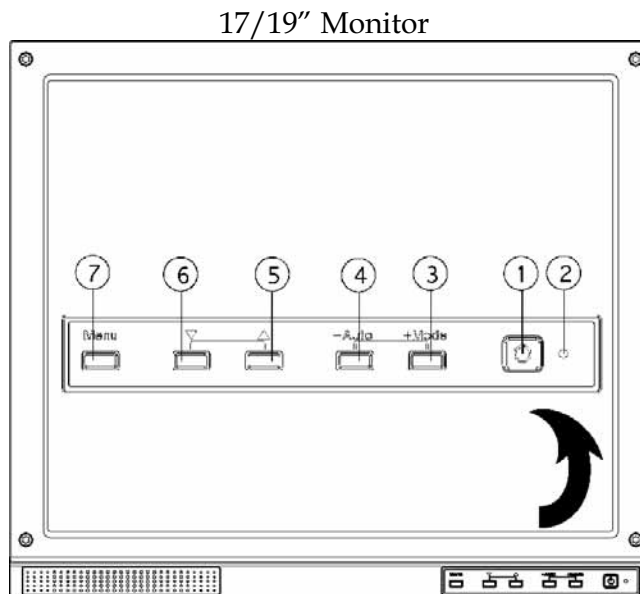

- ① **Power Switch:** Press to switch monitor on/off.
- ② **LED Indicator:** Power light indicator.
- ③ **+ / Mode :**
  - [1] Press to input the Source and to select from Picture, Setup or PC
  - [2] Press to select next input signal. (Read ※ Remark)
  - [3] Press to increase the value of OSD option selected.
- ④ **- / Auto :**
  - [1] VGA signal auto adjustment.
  - [2] Press to decrease the value of OSD option selected.
- ⑤ **▲ / ● :**
  - [1] Select OSD options upwards.
  - [2] Contrast Adjust
- ⑥ **▼ / ☀ :**
  - [1] Select OSD options down wards.
  - [2] Brightness Adjust
- ⑦ **Menu:** Recall or close OSD display, enter or return selection.

※ **Remark :**  
Input signal order: BNC/VGA/S-Video.

## 2.2 OSD Menu

The OSD menu is divided into three parts:

- For VGA: Picture, Setup and PC
- For AV, AV1 and S-Video: Picture and Setup

Use the (-)/**Auto** and (+)/**Mode** to switch from each part of the OSD main menu.


- **VGA OSD Menu and definition of functions**



\* Above value/data is for reference only. It will change without notice

### VGA - Picture


Menu	Value	Definition of functions
<b>Brightness</b>	0~100	Adjust the back ground black level of the screen image
<b>Contrast</b>	0~100	Adjust fore ground white level of the screen image.
<b>Color Temp.</b>	User/sRGB/7500k/9300K	Press (+) or (-) to choose three types of color temperature: User,sRGB,7500,9300
<b>User Color R</b>	0~100	Adjust the red color's intensity of the screen image
<b>User Color G</b>	0~100	Adjust the green color's intensity of the screen image
<b>User Color B</b>	0~100	Adjust the blue color's intensity of the screen image

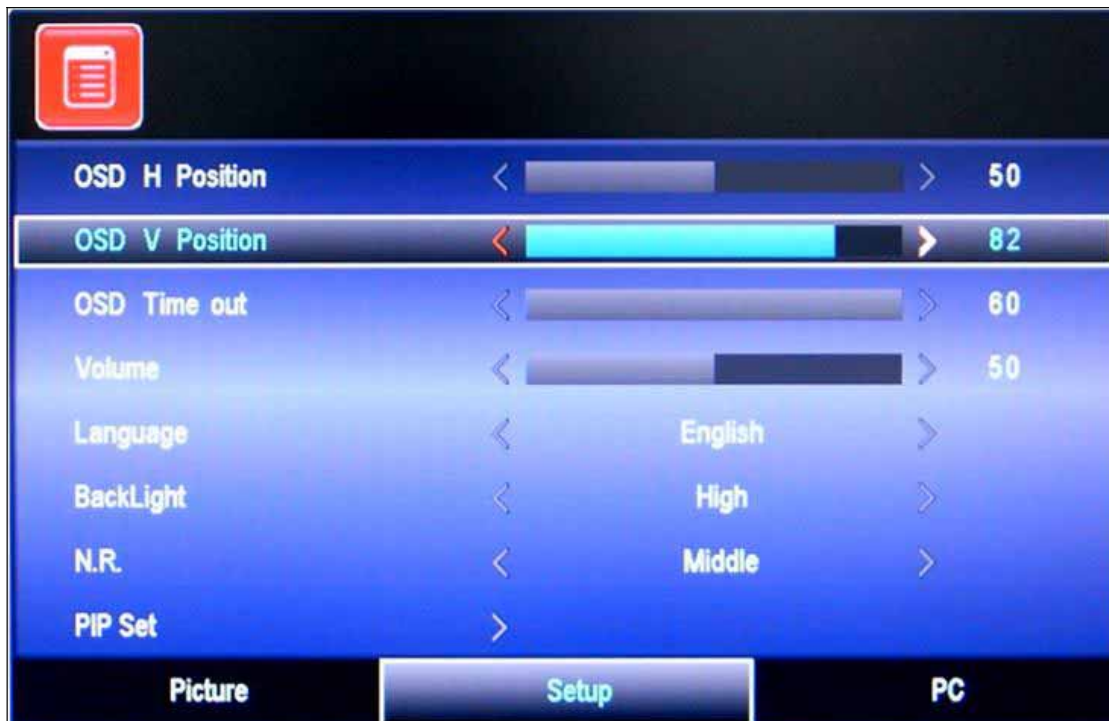

\* Above value/data is for reference only. It will change without notice

### VGA - Setup


Menu	Value	Definition of functions
OSD H-Position	0~100	Adjust the left or right position of the screen image
OSD V-Position	0~100	Adjust the up or down position of the screen image
Volume	0~100	Press (+), (-) to adjust the volume
Language	English, Traditional Chinese, Simplified Chinese, French, German, Spanish, Italian	Choose from among 7 languages: Traditional Chinese, Simplified Chinese, English, French, German, Spanish, Italian
Backlight	High, Middle, Low	Adjust lamp light level
N.R.	Off, Low, Middle, High	Press (+) or (-) to choose four types of noise reduction
PIP Setup		Press (+) or (-) to choose sub-screen
Reset		Press (+) or (-) to recall the default value

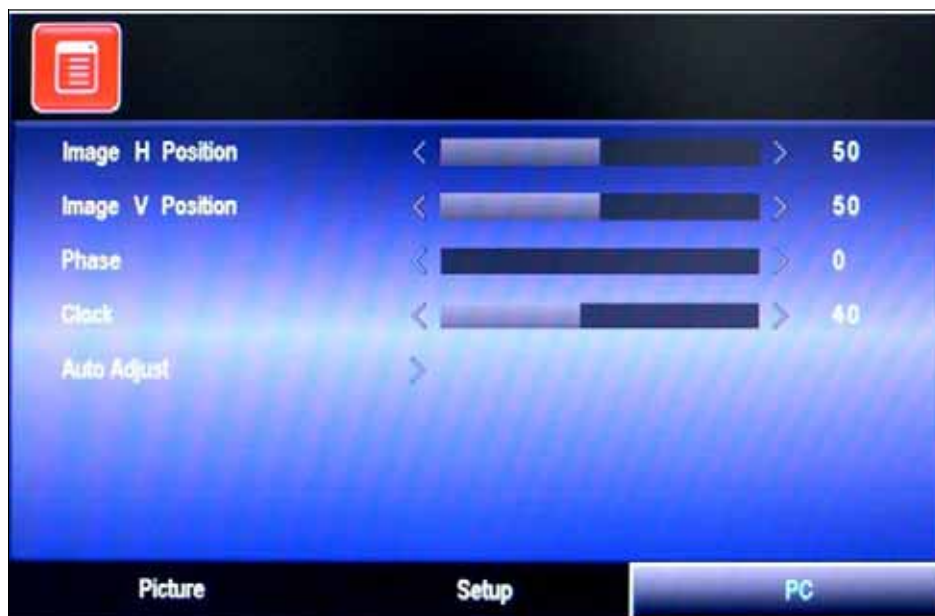

\* Above value/data is for reference only. It will change without notice

### VGA - PC

Menu	Value	Definition of functions
<b>Image H-Position</b>	0~100	Adjust the left or right position of the screen image
<b>Image V-Position</b>	0~100	Adjust the up or down position of the screen image
<b>Phase</b>	0~63	Adjust the clarity of the screen image
<b>Clock</b>	0~90	Adjust the horizontal sync width of the screen image
<b>Auto Adjust</b>		Press (+) or (-) to adjust the clarity, horizontal sync and position of the screen image

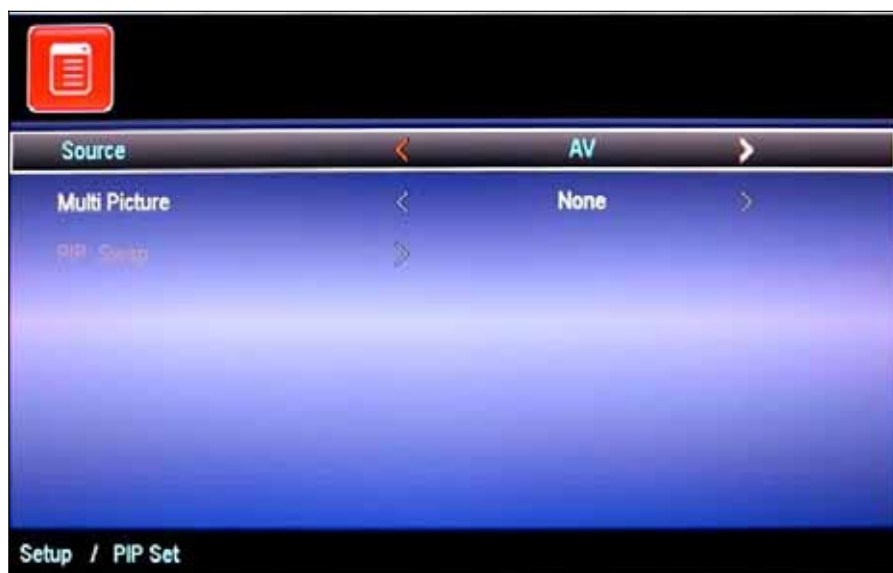

\* Above value/data is for reference only. It will change without notice

### PIP Setup Submenu

Menu	Value	Definition of functions
<b>Source</b>	VGA, DVI	Press (+) or (-) to choose sub screen
<b>Multi picture</b>	None, Small, Middle, Large, POP	Press (+) or (-) to choose PIP Mode


➤ **Composite and S-Video OSD Menu and definition of functions**



\* Above value/data is for reference only. It will change without notice

**Composite and S-Video - Picture**

Menu	Value	Definition of functions
Brightness	0~100	Adjust back ground black level of the screen image
Contrast	0~100	Adjust fore ground white level of the screen image
Sharpness	0~100	Adjust the clarity and focus of the screen image
Hue (COMPOSITE AND S-VIDEO NTSC Only)	0~100	Adjust of color tint
Color	0~100	Adjust the color density
Display Mode	4:3, 16:9, Over, Under, 1:1, Full	Adjust the display mode
Color Temp	Warm/Cool/User	Press (+) or (-) to choose two types of color temperature: warm, cool or user
Color Temp R	0~100	Adjust the red color's intensity of the screen image
Color Temp G	0~100	Adjust the green color's intensity of the screen image
Color Temp B	0~100	Adjust the blue color's intensity of the screen image

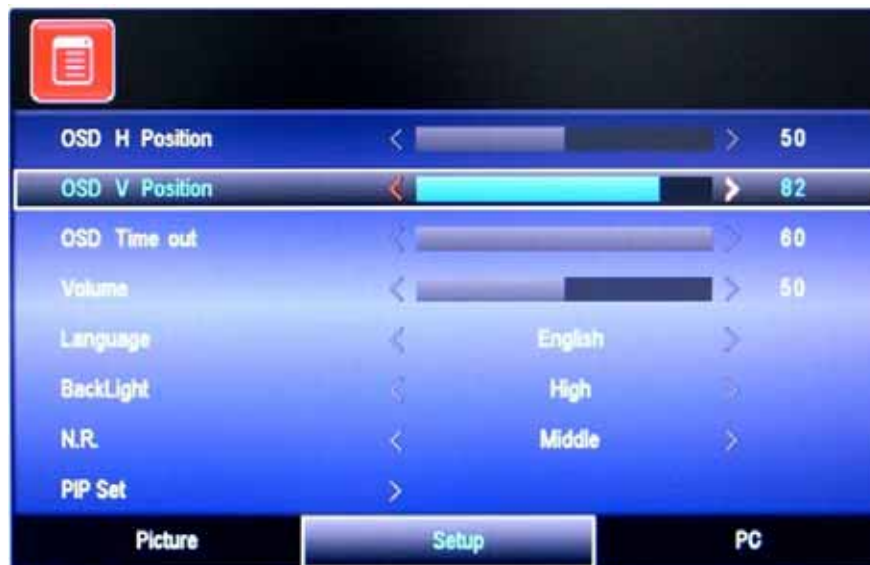

\* Above value/data is for reference only. It will change without notice

### AV, AV1 and S-Video - Setup

Menu	Value	Definition of functions
OSD H-Position	0~100	Adjust the left or right position of the screen image
OSD V-Position	0~100	Adjust the up or down position of the screen image
OSD Time Out	0~60	Adjust the time of the OSD time out.
Volume	0~100	Press (+) and (-) to adjust the volume
Language	English, Traditional Chinese, Simplified Chinese, French, German, Spanish, Italian	Choose from among 7 languages: Traditional Chinese, Simplified Chinese, English, French, German, Spanish, Italian
Backlight	High, Middle, Low	Adjust lamp light level
N.R.	Off, Low, Middle, High	Press (+) or (-) to choose four types of noise reduction
PIP Setup		Press (+) or (-) to choose sub-screen
Reset		Press (+) or (-) to recall the default value





\* Above value/data is for reference only. It will change without notice

### PIP Setup Submenu

Menu	Value	Definition of functions
Source	VGA, DVI	Press (+) or (-) to choose sub screen
Multi picture	None, Small, Middle, Large, POP	Press (+) or (-) to choose PIP Mode


### 2.3 Input Signal Icon

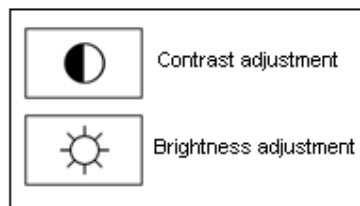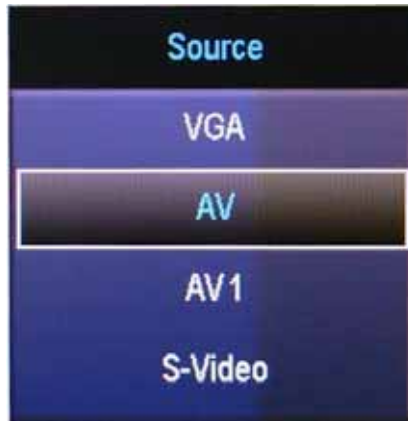

### 2.4 Viewing Angle


For the user's convenience, the LCD screen may be tilted according to their viewing requirements. The monitor can be tilted forward up to 25 degrees or backward up to 5 degrees.

**For 17"/19"**

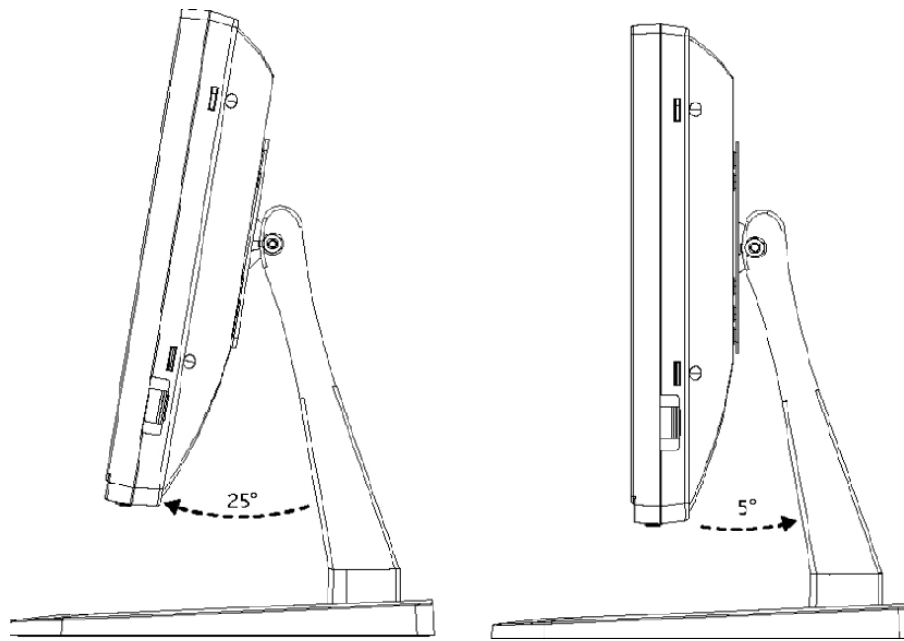

## 2.5 Installation


Insert the crutch into the slot of the base, and then screw it on the VESA mount onto the rear cover.

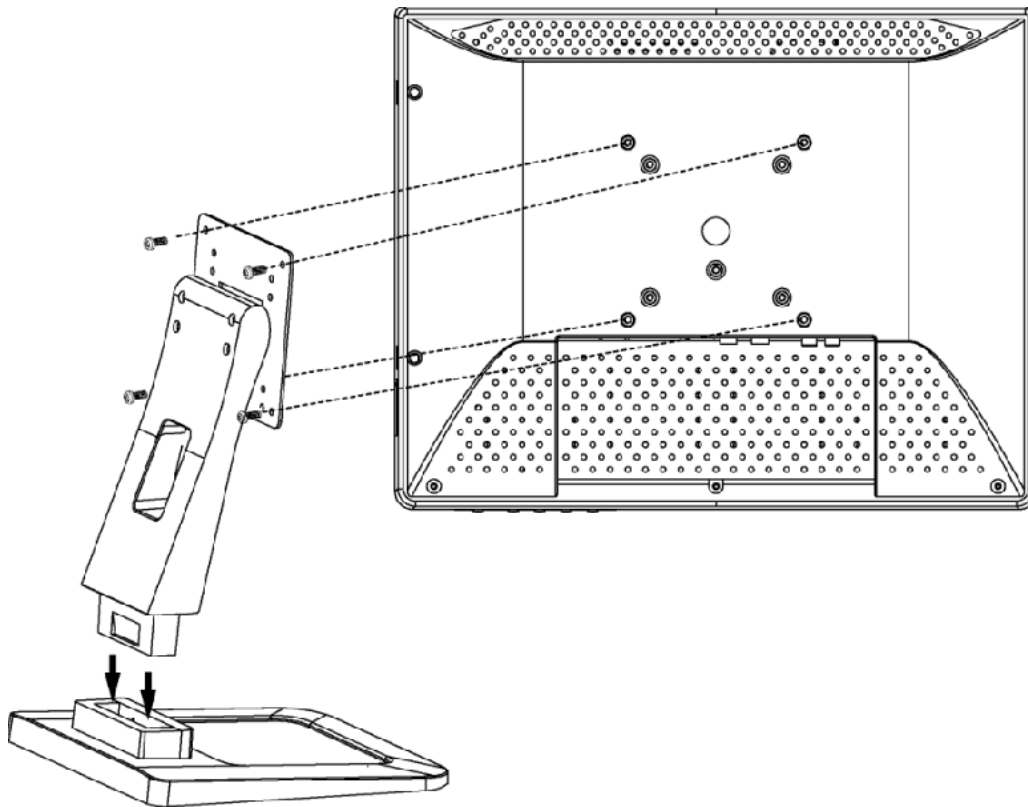

**Chapter 3**

**Signal Connector**

### 3.1 Signal Connector

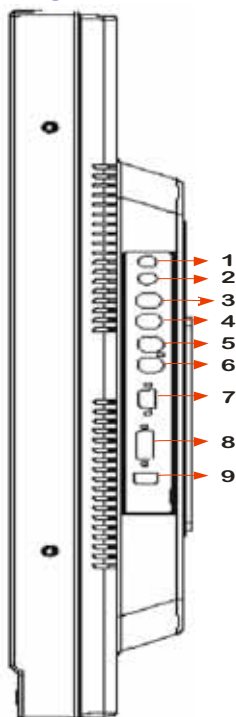

1. Audio OUT (RCA Jack): audio output terminal
2. Audio IN (RCA Jack) : audio input terminal
3. S-VIDEO OUT (BNC): connect to the input terminal of other video equipment
4. S-VIDEO IN (BNC): connect to the output terminal of video equipment, such as a VCR or a color video camera
5. Y/C OUT (4-Pin mini-Din): connect to another Y/C input terminal of camera VCR or other video equipment.
6. Y/C IN (4-Pin mini-Din): connect to the Y/C output terminal of camera VCR or other video equipment.
7. VGA IN: connect to an analogue R.G.B output terminal, such as a display card output VGA terminal of the personal computer
8. DVI IN: connect to a DVI cable
9. DC connector: plug head of power cord into a wall socket

**Note:**

※ When you choose a video signal screen without connecting any video signal, "No Signal" will be showed on the screen. When playing the video and removing the video signal at the same time, "Video Loss" will be shown on the screen. It is the same with another mode.

※ It takes about 2~3 seconds to change mode.

**Caution:**

AVOID directly pulling any cable when disconnecting devices from the monitor.

Always disconnect the devices carefully by firmly gripping the metal or plastic connector body and gently easing the connector from its socket.

***Chapter 4***

**Detail Specification & Warranty**

## 4.1 Details Specification

Model	SE Series	
	17"	19"
LCD Display	17" Active Matrix TFT LCD	19" Matrix Active TFT LCD
Viewable Size	337.920mm (H) x 270.336mm (V) <b>(5:4)</b>	376.32mm (H) x 301.06mm (V) <b>(5:4)</b>
Pixel Pitch	0.264 (H) x 0.264 (V) mm	0.294 (H) x 0.294 (V) mm
Resolution	1280 x 1024 <b>(SXGA)</b>	1280 x 1024 <b>(SXGA)</b>
Contrast Ratio	1000:1	1000:1
Brightness	<b>320</b> cd/m <sup>2</sup> (TYP.)	<b>250</b> cd/m <sup>2</sup> (TYP.)
Response Time Tr/Tf	5ms	5ms
Display color	16.7M	16.7M
Viewing Angle L/R	<b>L:80° , R:80° (TYP.)</b>	<b>L:80° , R:80° (TYP.)</b>
Viewing Angle U/D	<b>U:80° , D:80° (TYP.)</b>	<b>U:80° , D:80° (TYP.)</b>
Lamp Life Time	30,000 hrs	30,000 hrs
Scan Frequency	31.469KHz ~ 79.976KHz	31.469KHz ~ 79.976KHz
	56.25Hz ~ 75.029Hz	56.25Hz ~ 75.029Hz
Video Resolution	<b>500TVL</b>	
OSD Language	<b>*7 (including English, Traditional Chinese, Simplified Chinese, French, German, Spanish and Italian)</b>	
Display Mode	<b>Composite 1, S-video, VGA</b>	
Signal Connector	Input	<b>BNC x 1, S-Video x 1, VGA (15 Pin D-Sub) x 1, DVI-D in Dual Link type x 1</b>
	Output	<b>BNC x 1, S-Video x 1</b>
Audio Connector	Input	<b>PC Audio x 1, RCA Audio x 1</b>
	Output	<b>PC Audio x 1</b>
Audio Speaker	<b>1W</b>	
Cabinet Material / Color	Black / Plastic	
Power Input	AC100V ~ 240V 50/60Hz	
Power Output	N/A	
Power Supply	<b>DC 12V/3.5A</b>	<b>DC 12V/4A</b>
Power Consumption	40W (Max.)	45W (Max.)
Power Management	VESA DPMS Standard	
Operating Condition	<b>Temperature: 0°C ~ 40°C</b> <b>Humidity: 20% ~ 80%</b>	<b>Temperature: 0°C ~ 40°C</b> <b>Humidity: 20% ~ 85%</b>
Storage Condition	<b>Temperature: -20°C ~ 60°C</b> <b>Humidity: 15% ~ 85%</b>	<b>Temperature: -20°C ~ 60°C</b> <b>Humidity: 15% ~ 85%</b>
Net Weight (KG)	4.64	5.54
Gross Weight (KG)	6.64	7.84
Dimension (WxHxD) (mm)	385.89 x 406.75 x 240.0	424.19 x 437.35 x 240.0

## 4.2 After Service

After this product is unpacked, keep the carton and packing materials to ensure safe transportation in case of any after sales service.

The warranty is covered by a 12-month limited warranty, subject to normal conditions of use. If you experience any problems with this product, please contact your local dealer or supplier for repair and maintenance instructions.

Warranty Do NOT include:

- ※ Any damage resulting from incorrect use or careless operation or handling of the equipment.
- ※ Any damage caused by not operating the equipment in accordance with the manufacturer's instructions detailed in the "User Manual " .
- ※ Any tampering or removal of the monitor housing will invalidate the warranty.
- ※ Damages resulting from natural disasters e.g. flood, fire and earthquake.
- ※ Any damages caused by inappropriate transportation or storage of the equipment.