

AT-X5 Installation


The USFT AT-X5 is an integrated all-in-one GPS device. The AT unit requires 3 wires to operate efficiently.

Power / Ground / Ignition




- ◆ RED – 12 VDC Constant
- ◆ WHITE – Ignition/Accessory
- ◆ BLACK - Ground

For optimal performance, the AT-X5 unit should be placed with the top side of the unit facing towards the sky.

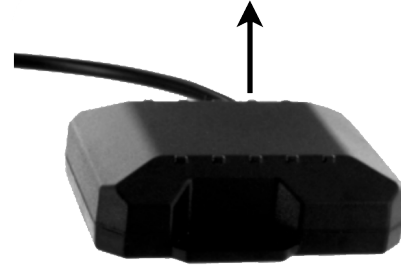

Optimal Device Placement

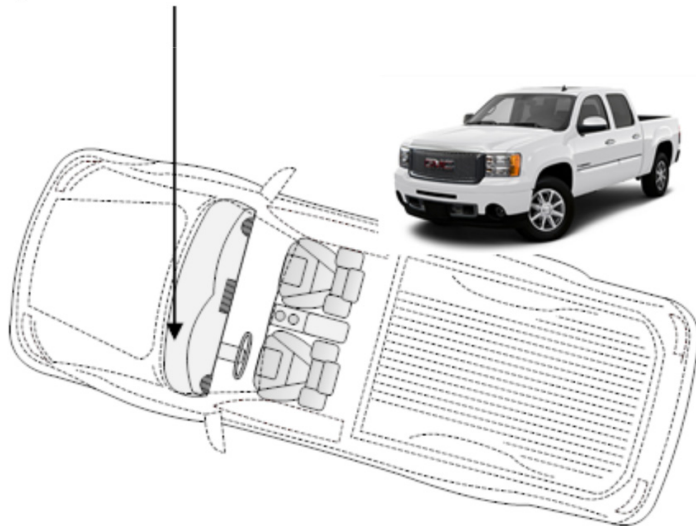

Place the AT-X5 unit on or under the dash at the center of the dashboard.

Run the cables along the side of the dash at the door hinge, and place the transceiver box under your dashboard. For best results, consider using a zip-tie to secure the transceiver to ensure that it doesn't fall from beneath the dash.

Securely attach the wiring harness to the AT-X5 transceiver

Note: We strongly recommend getting your power directly off of the ignition column. Most vehicles have constant power and an ignition wire #1.

Note: NEVER connect the RED and WHITE wires together and attach to a constant power source! The WHITE wire MUST be attached to an ignition / accessory wire.

Covert Installation

Many clients prefer to have the AT-X5 installation hidden from view.

Note: GPS signal will penetrate glass, plastic, foam, fiberglass and wood. GPS signal will NOT penetrate metal. For this reason it is important to place the device where it is not obstructed by metal or wiring.